


HOLE IN STRUCTURE

SLEEVE ASSEMBLY

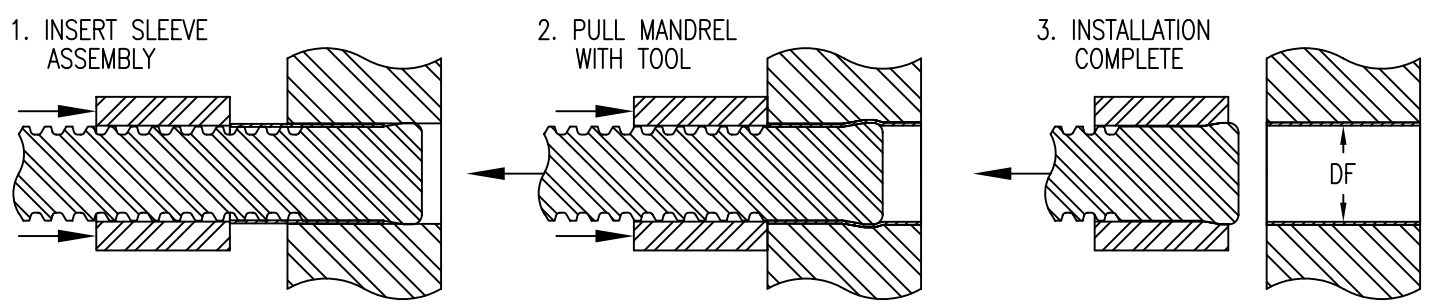

PART NUMBER	FASTENER SIZE	EXPANDED SLEEVE DIM DF	INITIAL SLEEVE DIMS		HOLE DIA DH
			DI	DO	
CB9296 C 08-()	.2495	.2508	.244	.260	.2620
	.2485	.2500	.242	.258	
CB9296 C 10-()	.3120	.3133	.306	.322	.3240
	.3110	.3125	.304	.320	
CB9296 C 12-()	.3745	.3758	.368	.384	.3870
	.3735	.3750	.366	.382	

CODE	SLEEVE MATERIAL	SPEC.	FINISH	SPEC.
C	A-286 CRES	AMS 5525	PASSIVATE	QQ-P-35

EXAMPLE PART NUMBER: **CB9296 C 08-400**

LENGTH L IN 1/16 INCH INCREMENTS $\pm .010$ (2 DIGITS)
 LENGTH L IN THOUSANDTHS OF AN INCH $\pm .005$ (3 OR 4 DIGITS)
 L MAX = 1.00

LENGTH L = .400 INCH
 FASTENER DIAMETER IN 32NDS - .2500 INCH
 MATERIAL - A-286 CRES
 BASIC PART NUMBER

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND CARSON CITY NEVADA 89706

APPROVALS		DATE		TITLE			
ANGLES	$\pm 1^\circ$	DRAWN	CGH	SLEEVE, FATIGUE LIFE EXTENSION			
.XX	$\pm .03$	CHECKED	DAC	SIZE	CAGE CODE	DWG. NO.	REV.
.XXX	$\pm .010$	RELEASED	CGH	A	66530	CB9296	0
.XXXX	$\pm .001$	REVISED		SCALE	4/1 14NOV99		SHEET 1 OF 1