

DEBURR AND BREAK ALL EDGES .005 - .015.
SURFACE TEXTURE 125 MICRONS Ra MAX.

GRIP LENGTH L SPECIFIED IN THOUSANDTHS OF AN INCH.
MINIMUM LENGTH AVAILABLE AS PER TABLE.

MATERIAL AND FINISH DATA

CODE	MATERIAL	SPEC.	FINISH	SPEC.
A	7075-T6 ALUMINUM	AMS 4122, QQ-A-225/9	ANODIZE	MIL-A-8625, TYPE 1, NO SEAL
CR	302, 303, 304 CRES OR A-286 CRES	AMS 5637, 5638, 5639, 5640, 5641 AMS 5726, 5731, 5732, 5734, 5737	PASSIVATE	QQ-P-35
CRA	A-286 CRES	AMS 5726, 5731, 5732, 5734, 5737	PASSIVATE	QQ-P-35
CRM	316 CRES	AMS 5648, 5649, 5653	PASSIVATE	QQ-P-35
T	6AL-4V TITANIUM	AMS 4928, 4965, 4967	NONE	

THREAD AND DIMENSION DATA AND STRENGTH REQUIREMENTS - THREAD T PER MIL-S-8879

CODE	THREAD T	A DIA	B DIA	L MIN	TENSILE (LBS MIN)	
					ALUMINUM	STEEL
06	.1380-32 UNJC-3B	.250	.62	.100	560	560
08	.1640-32 UNJC-3B	.250	.62	.100	860	860
324	.1900-24 UNJC-3B	.312	.75	.100	-	-
3	.1900-32 UNJF-3B	.312	.75	.100	1230	1230
420	.2500-20 UNJC-3B	.375	1.00	.180	-	-
4	.2500-28 UNJF-3B	.375	1.00	.180	1140	2290

OPTIONAL PRIMER

CODE	BASEPLATE PRIMER	SPEC.
P	EPOXY PRIMER	MIL-P-85582

EXAMPLE PART NUMBER

CB5006 A 3-200 P

OPTIONAL PRIMER ON BASEPLATE
GRIP LENGTH L IN THOUSANDTHS - .200 INCH
THREAD SIZE T - .1900-32 UNJF-3B
BUSHING MATERIAL - ALUMINUM, ANODIZED
BASIC PART NUMBER

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.


GLICK BOND

CARSON CITY
NEVADA 89706

CAD CB5006-1

APPROVALS	DATE
DRAWN <i>DAC</i>	9MAY03
CHECKED <i>DAC</i>	9MAY03
RELEASED <i>CGH</i>	9MAY03
REVISED <i>DAC</i>	9MAY03

TITLE			
BUSHING, THREADED, ELASTIC FIXTURE			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB5006	6
SCALE	2/1	9MAY03	SHEET 1 OF 2

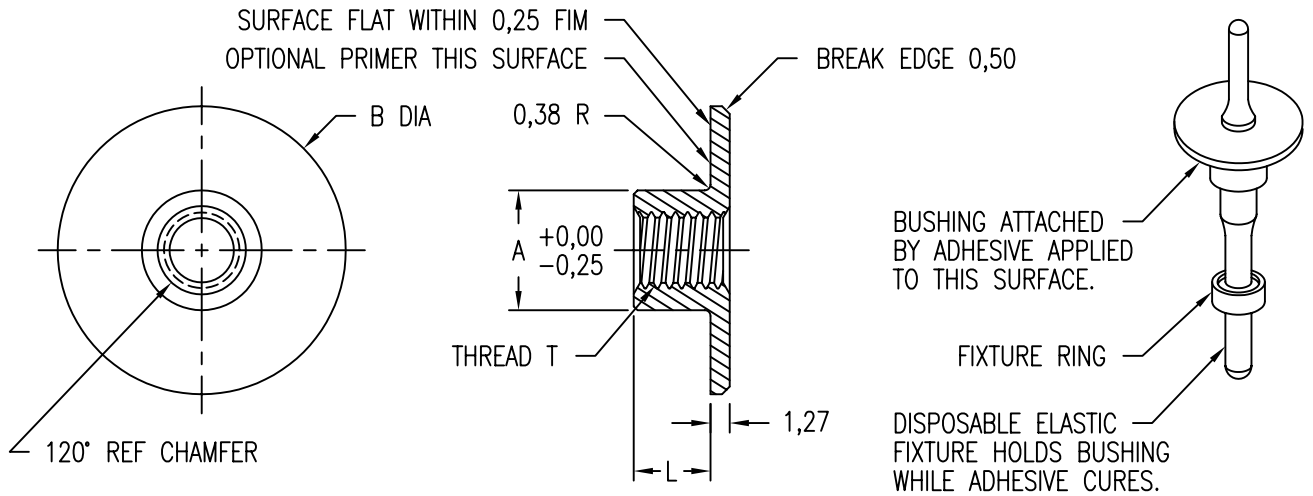

DEBURR AND BREAK ALL EDGES 0,25.
SURFACE TEXTURE 3,2 MICROMETERS MAX.

GRIP LENGTH L SPECIFIED IN MILLIMETERS.
MINIMUM LENGTH AVAILABLE AS PER TABLE.

MATERIAL AND FINISH DATA

CODE	MATERIAL	SPEC.	FINISH	SPEC.
A	7075-T6 ALUMINUM	AMS 4122, QQ-A-225/9	ANODIZE	MIL-A-8625, TYPE 1, NO SEAL
CR	302, 303, 304 CRES OR A-286 CRES	AMS 5637, 5638, 5639, 5640, 5641 AMS 5726, 5731, 5732, 5734, 5737	PASSIVATE	QQ-P-35
CRA	A-286 CRES	AMS 5726, 5731, 5732, 5734, 5737	PASSIVATE	QQ-P-35
CRM	316 CRES	AMS 5648, 5649, 5653	PASSIVATE	QQ-P-35
T	6AL-4V TITANIUM	AMS 4928, 4965, 4967	NONE	

THREAD AND DIMENSION DATA AND STRENGTH REQUIREMENTS - THREAD T PER ISO5855

CODE	THREAD T	A DIA	B DIA	L MIN	TENSILE (kN MIN)
3M	MJ3 X 0,5 4H6H	6,35	15,9	3	2,5
4M	MJ4 X 0,7 4H6H	6,35	15,9	3	3,8
5M	MJ5 X 0,8 4H6H	7,95	19,1	3	5,5

OPTIONAL PRIMER

CODE	BASEPLATE PRIMER	SPEC.
P	EPOXY PRIMER	MIL-P-85582

EXAMPLE PART NUMBER

CB5006 A 5M 5M P

OPTIONAL PRIMER ON BASEPLATE
GRIP LENGTH L IN MILLIMETERS - 5 MM
THREAD SIZE T - MJ5 X 0,8 4H6H
BUSHING MATERIAL - ALUMINUM, ANODIZED
BASIC PART NUMBER

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

CAD CB5006-2
METRIC DIMENSIONS

APPROVALS	DATE
DRAWN DAC	9MAY03
CHECKED <i>[Signature]</i>	9MAY03
RELEASED CGH	9MAY03
REVISED DAC	9MAY03

TITLE			
BUSHING, THREADED, ELASTIC FIXTURE			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB5006 (METRIC)	6
SCALE	2/1		9MAY03
SHEET 2 OF 2			