

| PART NUMBER | BOLT SIZE | A ±.005 | DI | DO | MAXIMUM LENGTH L |
|-------------------|-----------|---------|-------------|-------------|------------------|
| CB5907()55()() | .1640 | .328 | .1670-.1685 | .1840-.1850 | .750 |
| CB5907()06()() | .1900 | .380 | .1930-.1945 | .2095-.2105 | 1.000 |
| CB5907()08()() | .2500 | .505 | .2530-.2545 | .2696-.2706 | 1.000 |
| CB5907()10()() | .3125 | .631 | .3155-.3170 | .3321-.3331 | 1.000 |
| CB5907()12()() | .3750 | .758 | .3780-.3795 | .3946-.3956 | 1.000 |

MATERIAL AND FINISH DATA

| CODE | MATERIAL | SPEC. | CONDITION | FINISH | SPEC. |
|------|------------|----------|-----------|-----------|---------|
| C | A-286 CRES | AMS 5525 | AS FORMED | PASSIVATE | QQ-P-35 |
| D | A-286 CRES | AMS 5525 | ANNEALED | PASSIVATE | QQ-P-35 |

FIXTURE CODE


| CODE | FIXTURE COMPONENTS |
|------|--------------------|
| E | ELASTIC & RETAINER |
| N | NO FIXTURE |

SURFACE FINISH

| CODE | TREATMENT |
|------|--------------|
| - | NONE |
| B | POWDER BLAST |
| C | CAD PLATED |
| P | EPOXY PRIMER |

EXAMPLE PART NUMBER

CB5907 C 08 B 200 E

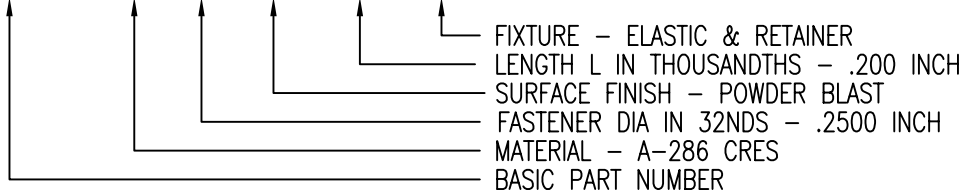

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

PANDOR

| APPROVALS | DATE |
|--------------|---------|
| DRAWN BSP | 17MAR00 |
| CHECKED DAC | 17MAR00 |
| RELEASED CGH | 21MAR00 |
| REVISED | |

| TITLE | | | |
|--|-------------|----------|--------------|
| SLEEVE, BOLT CLEARANCE, PROTRUDING HEAD, ADHESIVE BONDED | | | |
| SIZE | CAGE CODE | DWG. NO. | REV. |
| A | 66530 | CB5907 | 0 |
| SCALE | 4/1 17MAR00 | | SHEET 1 OF 1 |