

BASEPLATE MATERIAL

CODE	MATERIAL
C	CARBON/EPOXY, 350°F CURE
E	GLASS/EPOXY, 350°F CURE
G	GLASS/EPOXY, 250°F CURE
U	GLASS/PEI, 30% GLASS
UC	CARBON/PEI, 30% CARBON
V	GLASS/PEI, 40% GLASS
VC	CARBON/PEI, 40% CARBON
W	GLASS/PEI, 30% GLASS, LOW HEAT RELEASE
WC	CARBON/PEI, 30% CARBON, LOW HEAT RELEASE

OPTIONAL BASEPLATE PRIMER

CODE	PRIMER	SPEC.
P	EPOXY PRIMER	MIL-PRF-85582

RIVET MATERIAL: 300 SERIES CRES OR A-286 CRES.
RIVET FINISH: PASSIVATE PER AMS-QQ-P-35.

MANUFACTURER'S OPTION:
300 SERIES CRES TRIM WASHER UNDER RIVET HEAD.

SADDLE MATERIAL AND FINISH DATA


CODE	MATERIAL	SPEC.	COLOR
N	NYLON, NATURAL	ASTM D4066 OR EQUAL	NATURAL
NB	NYLON, BLACK, STABILIZED	ASTM D4066 OR EQUAL	BLACK
P	PEEK	NONE	NATURAL
T	TEFZEL	FLUOROPOLYMER	BLUE
V	POLYETHERIMIDE	ULTEM 1000 OR EQUAL	NATURAL
VC	CARBON/PEI	ASTM D5205	NATURAL

DIMENSION DATA

SIZE CODE	MAX TIE WIDTH D REF	SADDLE DIMENSIONS		
		A	B	C
2	.100	.56	.34	.37
3	.190	.67	.44	.43
5	.350	.92	.56	.52

EXAMPLE PART NUMBER

CB4019 G 3 V 750 P

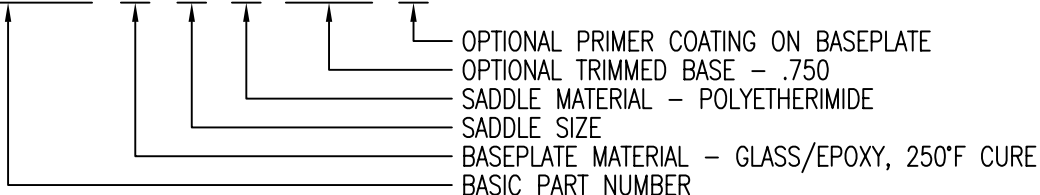

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

ANGLES	±1°	APPROVALS		DATE
		DRAWN	DATE	
.XX	±.03	CHECKED <i>DAC</i>		16DEC04
.XXX	±.010	RELEASED <i>CGH</i>		2JAN05
.XXXX	±.001	REVISED <i>DAC</i>		16DEC04

TITLE			
MOUNT, CABLE TIE, COMPOSITE BASE			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB4019	21
SCALE	1/1	16DEC04	SHEET 1 OF 1