

PART NUMBER	BOLT SIZE	A ±.005	DI	DO	MAXIMUM LENGTH L	(HF)	(HS)	(M)	(P)
CB5906()55()()	.1640	.328	.1670-.1685	.1840-.1850	.750	.070	.074	.2670	.0280
CB5906()06()()	.1900	.380	.1930-.1945	.2095-.2105	1.000	.080	.084	.3146	.0301
CB5906()08()()	.2500	.505	.2530-.2545	.2696-.2706	1.000	.108	.112	.4244	.0354
CB5906()10()()	.3125	.631	.3155-.3170	.3321-.3331	1.000	.135	.139	.5388	.0407
CB5906()12()()	.3750	.758	.3780-.3795	.3946-.3956	1.000	.162	.166	.6531	.0463

MATERIAL AND FINISH DATA


CODE	MATERIAL	SPEC.	CONDITION	FINISH	SPEC.
C	A-286 CRES	AMS 5525	AS FORMED	PASSIVATE	QQ-P-35
D	A-286 CRES	AMS 5525	ANNEALED	PASSIVATE	QQ-P-35

FIXTURE CODE

CODE	FIXTURE COMPONENTS
NONE	GAGE, ELASTIC, & RETAINER
E	ELASTIC & RETAINER
N	NO FIXTURE

EXAMPLE PART NUMBER

CB5906 C 08 B 200

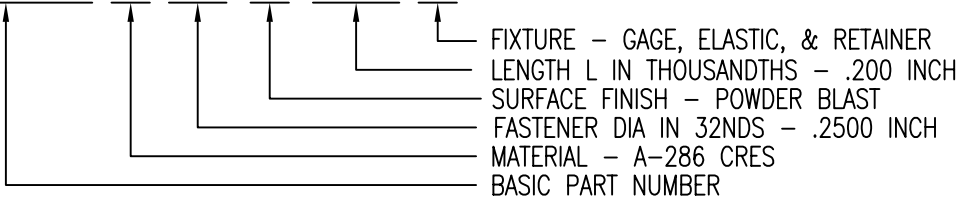

SURFACE FINISH

CODE	TREATMENT
-	NONE
B	POWDER BLAST
C	CAD PLATED
P	EPOXY PRIMER
AC	ALUMINUM COAT

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

PANDOR

APPROVALS	DATE
DRAWN BSP	17MAR00
CHECKED DAC	21MAR00
RELEASED CGH	21MAR00
REVISED BSP	17MAR00

TITLE			
SLEEVE, BOLT CLEARANCE, 100° TENSION HEAD, ADHESIVE BONDED			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB5906	2
SCALE	4/1	22FEB99	17MAR00
SHEET 1		OF 1	