


Tri-Cylinder Compression Riveters Alligator & C-Yoke Models

Standard Features

- ergonomic design
- 50% weight reduction over larger models
- high strength forged jaws
- precision bearings and shafts

Caractéristiques

- conception ergonomique
- 50% plus léger que d'autres modèles identiques
- mâchoires forgées haute résistance
- roulements et arbre de précision

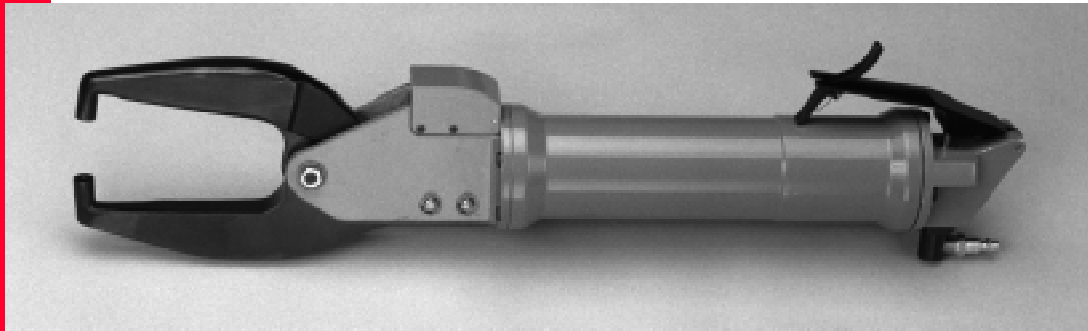

Alligator Jaw Type

MODEL NO.	POWER UNIT ONLY ORDERING NO.	JAW REACH	CAPACITY COLD RIVET		POUNDS MAX FORCE AT 90 PSI	NET WEIGHT WITH JAWS		OVERALL LENGTH	AIR INLET
			ALUMINUM	STEEL		LBS.	KG.		
735A	17283	3"	1/4" 6.4mm	3/16" 4.8mm	10000	8.44	3.3	20.2" 553mm	1/4" NPT
		5"	3/16" 4.8mm	5/32" 4.0mm	6800	9.46	4.3	22.5" 572mm	
		7"	5/32" 4.0mm	1/8" 3.2mm	4000	11.12	5.0	24.8" 630mm	

C-Yoke Type

MODEL NO.	POWER UNIT ONLY ORDERING NO.	CAPACITY COLD RIVET		POUNDS MAX FORCE AT 90 PSI	PART OF STROKE AT	NET WEIGHT WITH C-YOKE		OVERALL LENGTH	AIR INLET
		ALUMINUM	STEEL			LBS.	KG.		
735C	16357	5/16" 7.9mm	1/4" 6.4mm	11000	1/8" 3.2mm	10.1	4.6	21.0" 525mm	1/4" NPT

C-Yoke Assemblies

YOKE ASSY. NO.	GAP	REACH	SET HOLE SIZE	THICKNESS
7479	1-1/4"	1-1/2"		3/4"
7481	1-1/2"	2"		7/8"
7482	1-1/2"	3"	3/16"	1-1/8"
7483	2"	1-1/2"		1"
7484	1-3/8"	2-1/2"		1"
7485	1-3/4"	2-1/2"		1-1/8"
3052	1-1/4"	1-1/2"		3/4"
6477	1-1/2"	2"		7/8"
6478	1-1/2"	3"	1/4"	3/4"
6479	2"	1-1/2"		1"
6480	1-5/8"	2-1/2"		1"
6481	1-3/4"	2-1/2"		1-1/8"

Alligator Jaw Assemblies

JAW ASSY. NO.	SET HOLE SIZE	REACH	MAX. TRAVEL
17148	3/16" 4.8mm	3" 75mm	7/8" 22mm
17149	1/4" 6.4mm	3" 75mm	7/8" 22mm
17146	3/16" 4.8mm	5" 125mm	1-1/4" 32mm
17147	1/4" 6.4mm	5" 125mm	1-1/4" 32mm
19000	3/16" 4.8mm	7" 178mm	1-1/2" 38mm



a GFI AEROSPACE Company

Hi-Shear Corporation
2600 Skypark Drive
Torrance, CA 90509 USA
tel 310.326.8110
fax 310.784.4144

Hi-Shear Fasteners Europe Ltd.
Butlers Leap, Rugby
Warwickshire CV21 3RQ England
tel 0788.560916
fax 0788.568183