

PART NUMBER	BOLT SIZE	A ±.005	DI	DO	MAXIMUM LENGTH L
CB5907( )55( )( )	.1640	.328	.1670-.1685	.1840-.1850	.750
CB5907( )06( )( )	.1900	.380	.1930-.1945	.2095-.2105	1.000
CB5907( )08( )( )	.2500	.505	.2530-.2545	.2696-.2706	1.000
CB5907( )10( )( )	.3125	.631	.3155-.3170	.3321-.3331	1.000
CB5907( )12( )( )	.3750	.758	.3780-.3795	.3946-.3956	1.000

MATERIAL AND FINISH DATA

CODE	MATERIAL	SPEC.	CONDITION	FINISH	SPEC.
C	A-286 CRES	AMS 5525	AS FORMED	PASSIVATE	QQ-P-35
D	A-286 CRES	AMS 5525	ANNEALED	PASSIVATE	QQ-P-35

FIXTURE CODE


CODE	FIXTURE COMPONENTS
E	ELASTIC & RETAINER
N	NO FIXTURE

SURFACE FINISH

CODE	TREATMENT
-	NONE
B	POWDER BLAST
C	CAD PLATED
P	EPOXY PRIMER

EXAMPLE PART NUMBER

CB5907 C 08 B 200 E

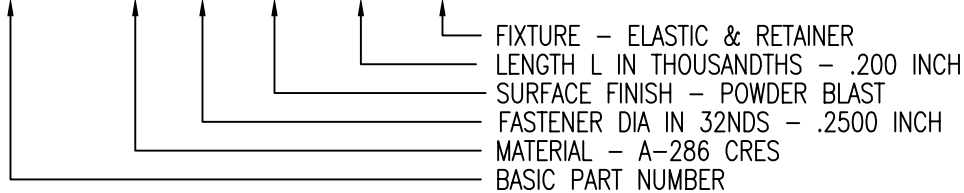

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

**GLICK BOND**

CARSON CITY  
NEVADA 89706

PANDOR

APPROVALS	DATE
DRAWN BSP	17MAR00
CHECKED DAC	17MAR00
RELEASED CGH	21MAR00
REVISED	

TITLE			
SLEEVE, BOLT CLEARANCE, PROTRUDING HEAD, ADHESIVE BONDED			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB5907	0
SCALE	4/1 17MAR00		SHEET 1 OF 1