

DIMENSION DATA

PART NUMBER	BOLT SIZE	A ±.005	DI	DO	L MAX ±.010
CB5947()55()()	.1640	.328	.1670-.1685	.1990-.2000	.750
CB5947()06()()	.1900	.380	.1930-.1945	.2250-.2260	1.000
CB5947()08()()	.2500	.505	.2530-.2545	.2852-.2862	1.000
CB5947()10()()	.3125	.631	.3155-.3170	.3477-.3487	1.000
CB5947()12()()	.3750	.758	.3780-.3795	.4102-.4112	1.000

MATERIAL AND FINISH DATA


CODE	MATERIAL	SPEC.	CONDITION	FINISH	SPEC.
C	A-286 CRES	AMS 5525	AS FORMED	PASSIVATE	QQ-P-35
D	A-286 CRES	AMS 5525	ANNEALED	PASSIVATE	QQ-P-35

FIXTURE CODE

CODE	FIXTURE COMPONENTS
E	ELASTIC & RETAINER
N	NO FIXTURE

EXAMPLE PART NUMBER

CB5947 C 08 B 200 E

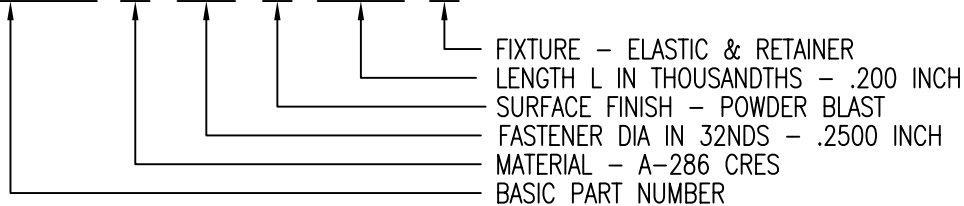

SURFACE FINISH

CODE	TREATMENT
-	NONE
B	POWDER BLAST
C	CAD PLATED
P	EPOXY PRIMER

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

PANDOR

APPROVALS	DATE
DRAWN DAC	2NOV00
CHECKED DAC	2NOV00
RELEASED CGH	3NOV00
REVISED DAC	2NOV00

TITLE			
SLEEVE, BOLT CLEARANCE, PROTRUDING HEAD, ADHESIVE BONDED			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB5947	1
SCALE	SHEET 1 OF 1		
4/1	2NOV00		