

ALL DIMENSIONS PRIOR TO PLATING.

* - LENGTH L IN 1/16 INCH INCREMENTS ±.010 (2 DIGITS)
LENGTH L IN THOUSANDTHS OF AN INCH ±.005 (3 DIGITS)

DIMENSION DATA

PART NUMBER	FOR BOLT SIZE	A ±.005 DIA	DI DIA	DO DIA	L MAX ±.010
JK5947 () 55 N () ()	#8	.328	.1685 .1670	.2000 .1990	.750
JK5947 () 06 N () ()	#10	.380	.1945 .1930	.2260 .2250	1.000
JK5947 () 08 N () ()	1/4	.505	.2545 .2530	.2862 .2852	1.000
JK5947 () 10 N () ()	5/16	.631	.3170 .3155	.3487 .3477	1.000
JK5947 () 12 N () ()	3/8	.758	.3795 .3780	.4112 .4102	1.000

MATERIAL DATA

CODE	MATERIAL	SPEC.	CONDITION	FINISH	SPEC.
C	A-286 CRES	AMS 5525	AS FORMED	PASSIVATE	QQ-P-35
D	A-286 CRES	AMS 5525	ANNEALED	PASSIVATE	QQ-P-35

SURFACE FINISH


CODE	FINISH	SPEC.
N	NONE	
P	PLATED	SPECIAL
AC	ALUMINUM COAT	NAS 4006

LUBRICATION DATA

CODE	LUBRICATION	SPEC.
NONE	NONE	
B	NONE	
L	CETYL ALCOHOL	MIL-L-87132

EXAMPLE PART NUMBER

JK5947 C 08 N 200 L

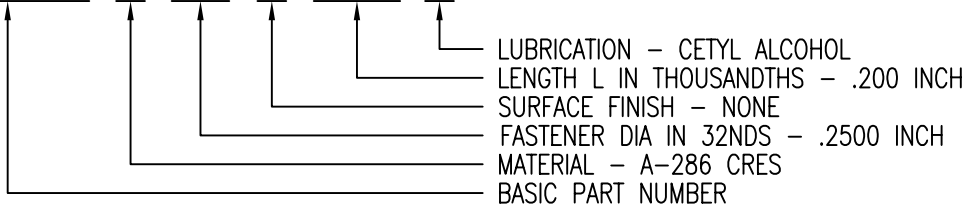

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PANDOR
STANDARD

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

APPROVALS	DATE
DRAWN	
CHECKED	
RELEASED	
REVISED	

TITLE			
SLEEVE, BOLT CLEARANCE, PROTRUDING HEAD			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	JK5947	H
SCALE	SHEET 1 OF 1		
4/1	2NOV00		